


# AC BLOWER 220x220x56mm

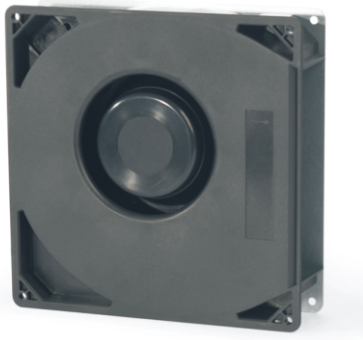

**Spiral Housing:** Fiberglass-Reinforced Polycarbonate  
**Housing Base:** Galvanized Steel Plate  
**Blade:** Thermoplastic PBT, UL 94V-0  
**Insulation Resistance:** 100M.Ω, 500VDC/min between bare wire and frame  
**Dielectric Strength:** 1500VAC for one minutue  
**Operation Temperature:** -20°C~70°C(Humidity 35%-85%RH)  
**Storage Temperature:** -40°C~85°C(Humidity 35%-85%RH)  
**Motor Protection:** Thermally Protected  
**Weight:** 1750 g     **Packing:** 8PCS/CTN

Model Number	Voltage (VAC)	Frequency (Hz)	AirFlow (CFM)	Stat.Pres. (mm-H <sub>2</sub> O)	Noise (dBA)	Speed (RPM)	Current (mA)	Power (W)	Available Bearing	Curves
FBA2256B11W7C-51	115	50/60	103.0/117.0	33.8/47.8	64.0/66.0	2,900/3,300	340/420	37/45	B	①/②
FBA2256B22W7C-51	230	50/60	104.0/120.0	33.8/47.8	64.0/66.0	2,900/3,400	160/200	36/44	B	①/②

Specifications are subject to change without notice



AC Blowers

