

**Standards and Specifications
of
Model: FBD7530B12W9-61-2RC1
(Auto Restart Protection)**

**A. General Specification**

Item		Specification / Standard / Condition	
01	Outline Dimension	75 x 77 x 30	mm
02	Bearing	Dual Ball Bearing	
03	Rated Voltage	DC 12	V
04	Operating Voltage	DC 6.00 V ~ DC 13.8	V
05	Starting Voltage	DC 6.00	V
06	Rated Current (Max.)	0.45	A
07	Actual Current	0.32	A
08	Power Consumption	3.84	W (Max.5.40W)
09	Rated Speed	3500 R.P.M. $\pm$ 10%	1. Free Air 2. Rated Voltage 3. 25 °C, 65% RH 4. After 10 Min. Rotating.
10	Maximum Airflow	12.50	CFM
11	Maximum Static Pressure	13.30	mm-H ₂ O
12	Noise Level	42.40	dB (A)
13	Life Expectancy	70,000 Hrs. at 40°C	1. L10 at Conf. Level 90%, 2. Rated Voltage
14	Net Weight	87	Gram
15	Number of Blade	Blades	
16	Number of Pole	4 Poles	
17	Rotating Direction	Counter-Clockwise	Looking at Rotor Side
18	Plastic Material: Housing, Blade	Housing: Plastic UL 94V-0 P.B.T. Blade: Plastic UL 94V-0 P.B.T.	
19	Lead Wire	UL Type #24 AWG, 102mm	Red: (+) Black: (-)
20	Connector	Molex housing P/N 03-06-1023 & terminal P/N 02-06-1131	
21	Special Function	Without	

B. Electrical Specification


Item		Specification / Condition	
01	Locked Rotor Protection	✓	Safety Condition
		✓	a. Auto power off after locked at rated voltage for 1 sec. b. After auto power off, circuit attempt to restart in 2-6 sec.
02	Polarity Protection	✓	a. Circuit is protected when VCC & GND are exchanged, b. The circuit won't be burned within 5 seconds.
03	Insulation Resistance	✓	10 m.Ohm / between unshielded wire and frame at 500 VDC/min.
04	Dielectric Strength	✓	5 mA Maximum. / Measured between lead wire (+) and frame at 500 VAC/min.

C. Environmental Specification

Item		Specification / Condition
01	Operating Condition	Temperature: -10°C ~ + 70°C Humidity: 35% ~ 85% RH
02	Storage Temperature	Temperature: -40°C ~ +70°C Humidity: 35% ~ 85% RH
03	Test of high & low Temperature	Test Circulation at -10°C & 70°C two times per 4 hours
04	Packing Vibration Test	Packing condition: X, Y, Z 3 directions, 1.1G load vibration test for 30 min.
05	Packing Shock Proof Test	1 corner, 3 edges, 6 faces natural drop from 60cm high, packed

D. Safety Approvals

Safety Approval	File No.
CE	TB10088262
UL	E194726
CUL	E194726
TUV	R50048194

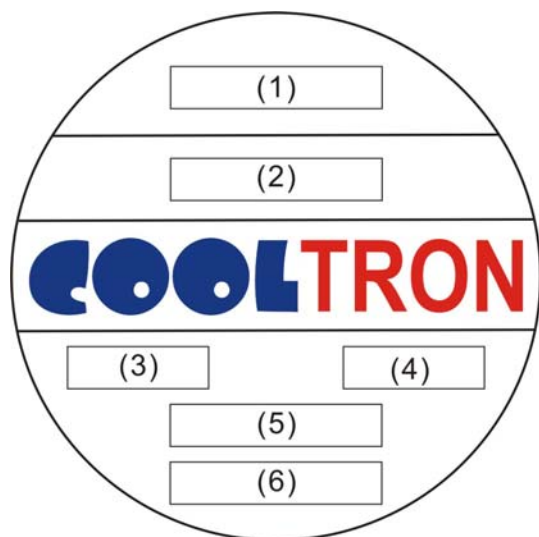
E. Label Marking01: Fan Label Marking

(1)	Safety Approval
(2)	Model Number & Appendix Code
(3)	Rated Voltage
(4)	Power Consumption
(5)	Bearing Type
(6)	Location


02: RoHS Label Marking:

Label	Location
RoHS & Date Code	Fan Outlet Frame

F. Air Flow Performance Curve

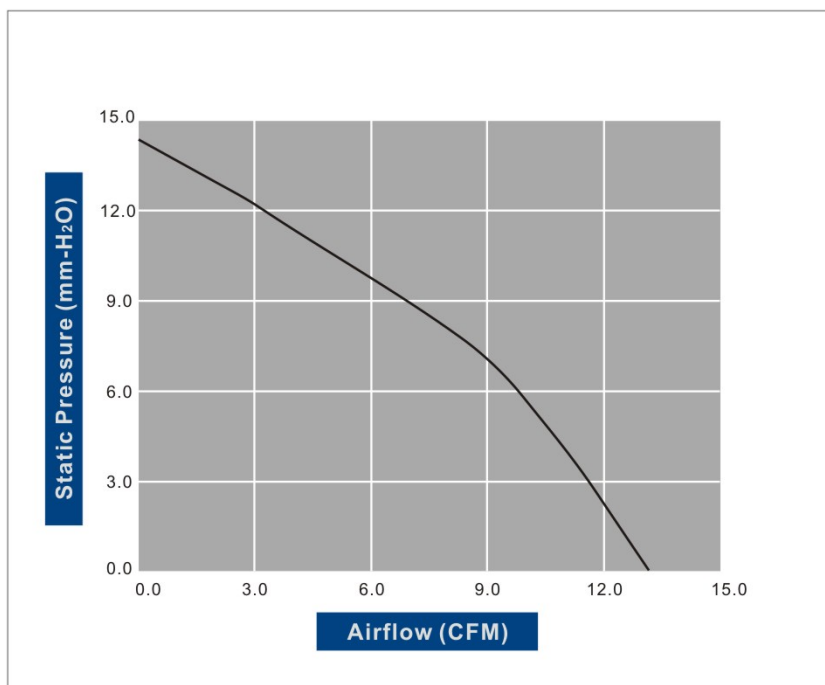

G. Model Drawing

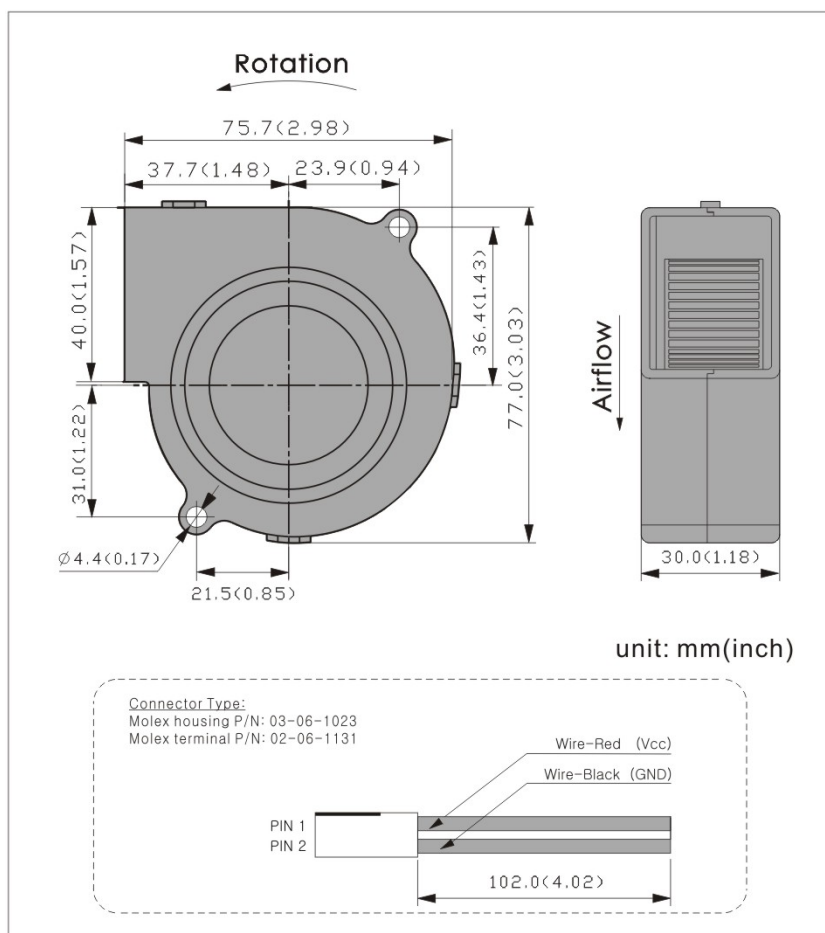

H. Fan Photos



FBD7530-61

